Electrolux 370 Lt Line

Refrigerators and Freezers

A range of 370 litre refrigerators and freezers designed to satisfy the food-conservation requirements of professional caterers who want the high performance and reliability of a commercial unit but who have limited space in the kitchen. The range consists of 4 compact models. Full door refrigerators and freezers in stainless steel or prepainted white.




727145

- Compact dimensions (60x60 cm footprint), with top usable for extra storage.
- LCD display with Turbo Cooling cycle, a time-based chilling or freezing cycle to maximise the food shelf life and automatic defrost.
- Easy temperature setting.
- Door lock as standard on all models.
- Internal light as standard on all refrigerators.
- No-frost technology as standard in all freezers.
- High standards of hygiene and ease of cleaning are guaranteed by the high impact white polystyrene internal cell with rounded corners.
- Thick door on all models for better insulation from the kitchen environment.
- Fan as standard.
- Front adjustable feet and rear wheels.
- Bottle holder as option for optimal storage of wine bottles and soft drinks.
- Built-in cooling unit for high ambient temperatures (43°C for refrigerators, 38°C for freezers).
- HCFC, CFC and HFC free insulation (Cyclopentane) and refrigerant gas (R600a).
- Developed and produced in an ISO 9001 and ISO 14001 certified factory.
- All models comply with the standards required by the main international approval bodies and are H marked.

CSQ IQNet CSQ eco ISO 14001 CE Electrolux

727145, 727143 — 727142, 727147

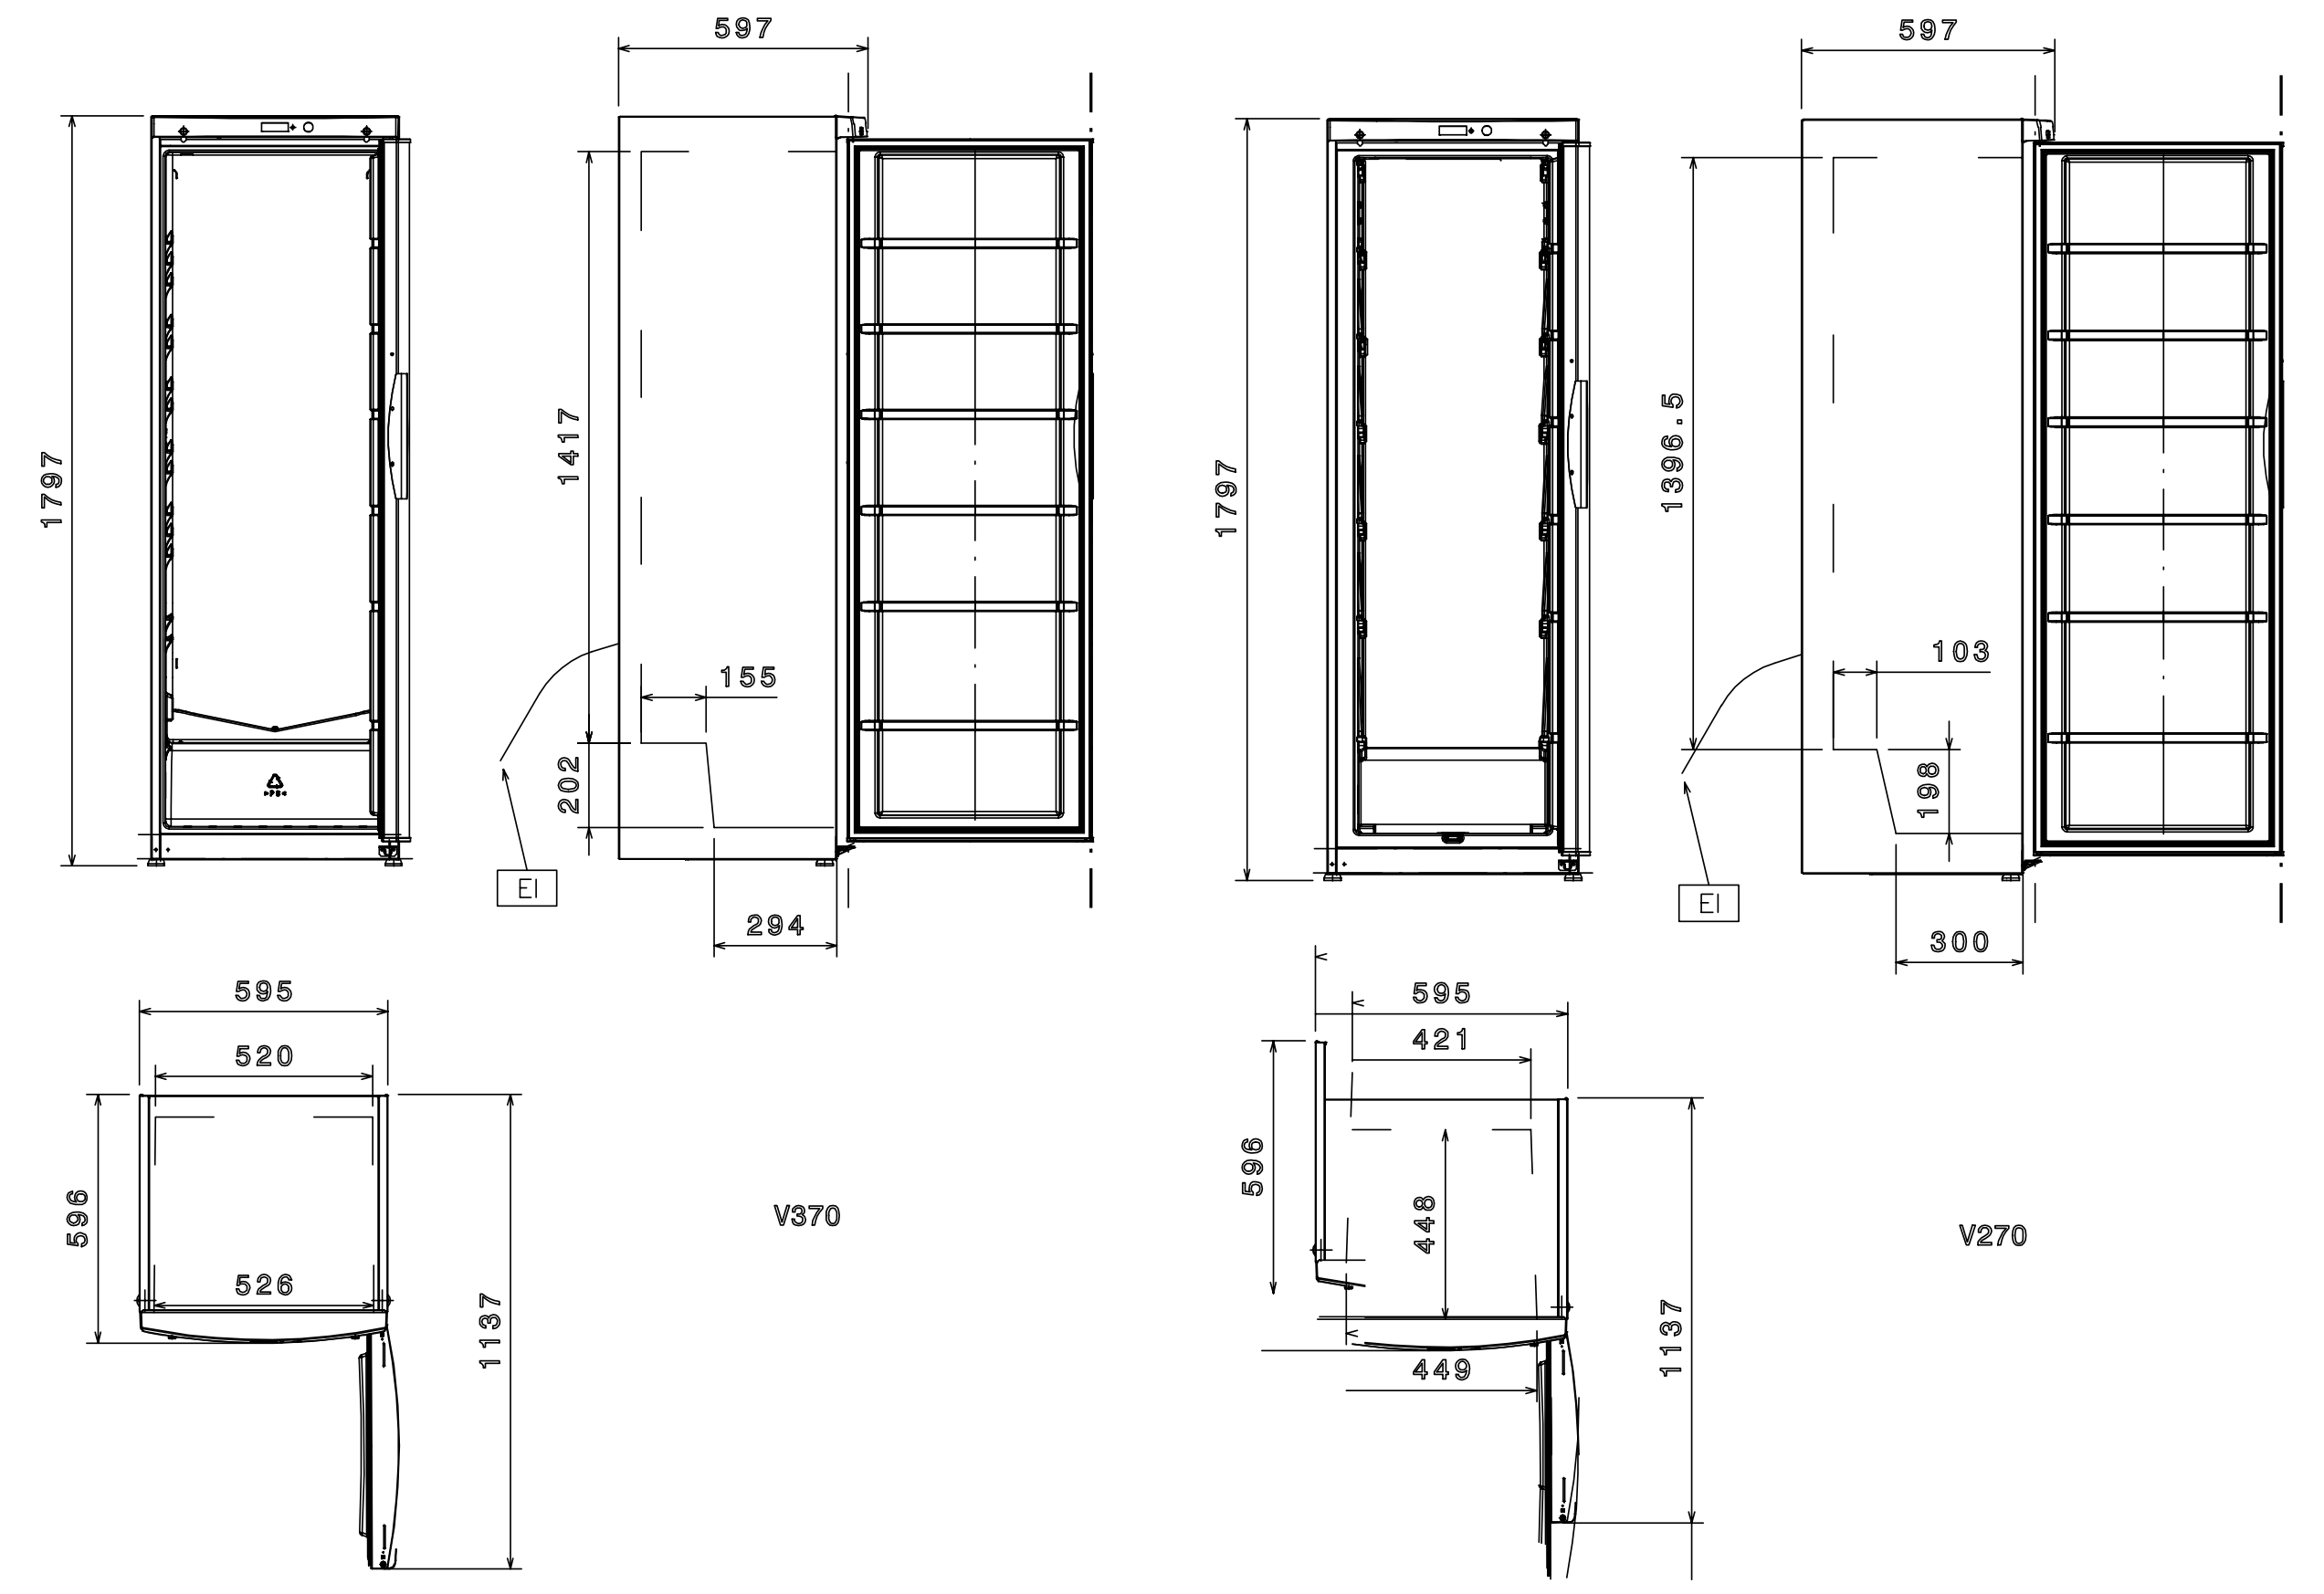

	R37P7VFX 727145	R37P7VFW 727143	R37F7VFX 727142	R37F7VFW 727147
LEGEND				
EI - Electrical connection	230-240 V, 1, 50	230-240 V, 1, 50	230-240 V, 1, 50	230-240 V, 1, 50
TECHNICAL DATA				
Operating temperature - min/max °C	2/8	2/8	-24/-16	-24/-16
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
External material				
panels	Prepainted Steel	Prepainted white	Prepainted Steel	Prepainted white
door	Stainless steel antifingertip	Prepainted white	Stainless steel antifingertip	Prepainted white
Internal material				
panels	Polystyrene	Polystyrene	Polystyrene	Polystyrene
Gross capacity (D.I.N. 8952) - l.	370	370	270	270
External dimensions - mm				
width	595	595	595	595
depth/with open doors	597, 1137	597, 1137	597, 1137	597, 1137
height	1797	1797	1797	1797
Internal dimensions - mm				
width	520	520	421	421
depth	435	435	448	448
height	1417	1417	1396	1396
Min/Max internal humidity - %	70	70		
Door hinges	Right Side	Right Side	Right Side	Right Side
N° and type of grids (included)	4	4	4	4
Refrigerant type	R600a	R600a	R600a	R600a
Refrigerant quantity - g.	36	36	46	46
Refrigeration power - W	93	93	167	167
Refrigerant power				
at evaporation temperature - °C	-26	-26	-30	-30
Power - kW				
installed-electric	0.101	0.101	0.066	0.066
Noise level - dBA	44.5	44.5	44.5	44.5
Net weight - kg.	75	75	75	75
Power supply - V, phases, Hz	230-240 V, 1, 50	230-240 V, 1, 50	230-240 V, 1, 50	230-240 V, 1, 50